

GPT-NSSx-20DC GPON OLT Transceiver , SFP+, 20km Reach

Product Features

- Single fiber bi-directional data links with 2.5Gbps upstream and 1.25Gbps downstream
- Integrated with micro-optics WDM filter at 1490/1310nm
- 1490nm Continuous Mode 2.488 Gbps DFB Transmitter
- 1310nm Burst Mode 1.244 Gbps APD-TIA Receiver
- LVTTTL receiver Fast Burst Packet Detect indication
- Burst mode received signal strength indication (RSSI) function
- Single 3.3V power supply, 20km reach
- Complies with Telcordia (Bellcore) GR-468-CORE
- Class I laser safety standard IEC-60825 compliant
- Compliant with SFP MSA and SFF-8472
- Complies with ITU-T G.984.2 Class B+/ C+/ C++
- Operating case temperature:
Standard: 0 to +70°C




Applications

- GPON OLT For P2MP

Description

The GPT-NSSx-20DC transceiver with supports data rate of typical 2.488 Gbps for GPON OLT application up to 20km transmission distance, it's designed meeting with ITU-T G.984.2 Class B+/ C+/ C++ specifications. SC receptacle is for optical interface..

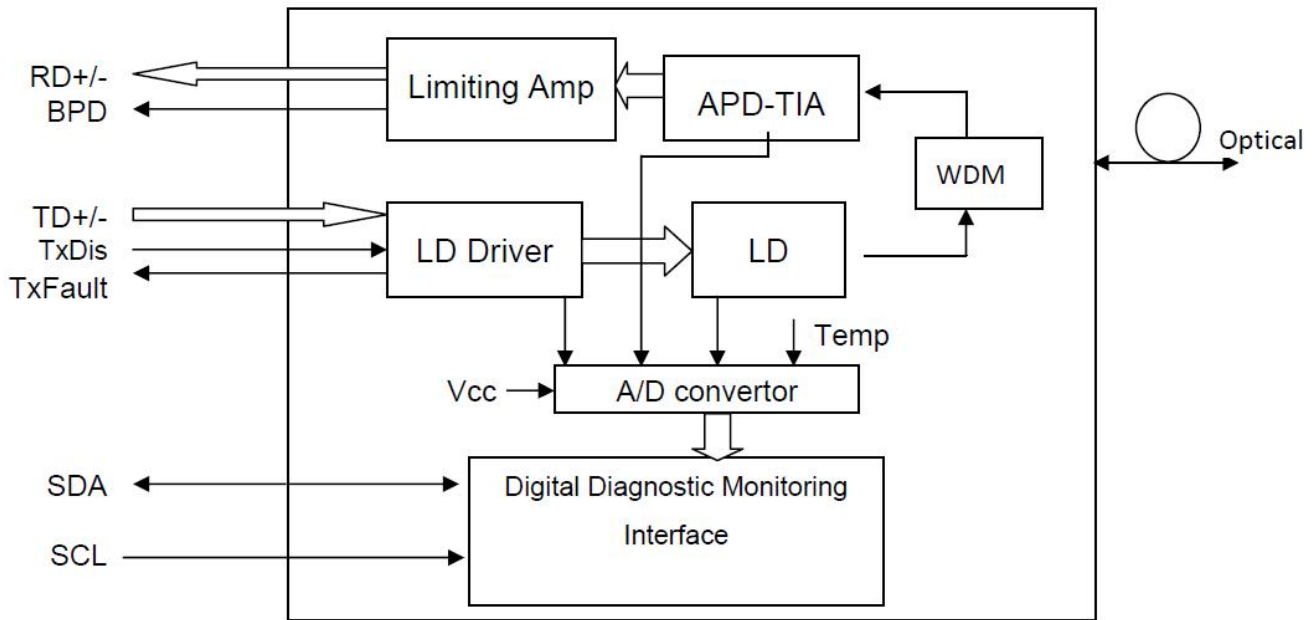

Transceiver functional diagram

Absolute Maximum Ratings

| Parameter | Symbol | Min | Max | Unit |
|---------------------|--------|------|------|------|
| Supply Voltage | Vcc | -0.5 | +3.6 | V |
| Storage Temperature | Ts | -40 | +85 | °C |
| Operating Humidity | - | 5 | 85 | % |

Recommended Operating Conditions

| Parameter | Symbol | Min | Typical | Max | Unit |
|-------------------------------|--------|-------|---------|-------|------|
| Operating Case Temperature | Tc | 0 | | +70 | °C |
| Power Supply Voltage | Vcc | 3.135 | 3.30 | 3.465 | V |
| Power Supply Current | Icc | | | 400 | mA |
| Damage Threshold For Receiver | | | | 4 | dBm |
| Data Rate | Tx | | 2.488 | | Gbps |
| | Rx | | 1.244 | | |

Optical and Electrical Characteristics

| Parameter | Symbol | Min | Typical | Max | Unit | Notes |
|---|-----------------|------|---------|----------|------|--------------------------------|
| Transmitter | | | | | | |
| Centre Wavelength | λ_c | 1480 | 1490 | 1500 | nm | |
| Spectral Width (RMS) | $\Delta\lambda$ | | | 1 | nm | |
| Side-Mode Suppression Ratio | SMSR | 30 | - | - | dB | |
| Average Output Power | P_{out} | 2 | | 5.5 | dBm | GPT-NSS2-20DC |
| | | 3.5 | | 7 | | GPT-NSS3-20DC |
| | | 5 | | 10 | | GPT-NSS4-20DC |
| Extinction Ratio | ER | 8.2 | | | dB | |
| Optical Rise / Fall Time | t_r / t_f | | | 150 | ps | |
| Transmitter Total Jitter | J_{p-p} | | | 0.1 | UI | |
| Transmitter Reflectance | RFL | | | -12 | dB | |
| Average Launched Power of Off Transmitter | P_{off} | | | -39 | dBm | |
| Data Input Swing Differential | V_{IN} | 300 | | 1600 | mV | 2 |
| TX Disable | Disable | | 2.0 | V_{cc} | V | |
| | Enable | | 0 | 0.8 | V | |
| TX Fault | Fault | | 2.0 | V_{cc} | V | |
| | Normal | | 0 | 0.8 | V | |
| Receiver | | | | | | |
| Centre Wavelength | λ_c | 1260 | 1310 | 1360 | nm | |
| Receiver Sensitivity | | | | -28 | dBm | GPT-NSS2-20DC |
| | | | | -30 | | GPT-NSS3-20DC GPT-NSS4-20DC |
| Receiver Overload | | | | -8 | dBm | GPT-NSS2-20DC |
| | | | | -10 | | GPT-NSS3-20DC GPT-NSS4-20DC |
| LOS De-Assert | LOS_D | | | -30 | dBm | |
| LOS Assert | LOS_A | -45 | | | dBm | |
| LOS Hysteresis | | 0.5 | | 5 | dB | |
| Data Output Low | V_{ol} | -2 | | -1.58 | V | |
| Data Output High | V_{oh} | -1.1 | | -0.74 | V | |
| LOS | High | 2.0 | | V_{cc} | V | |
| | Low | | | 0.8 | V | |

Notes:

1. Minimum Sensitivity and saturation levels for an NRZ 2²³-1 PRBS. BER≤10⁻¹⁰, 1.244Gpbs, ER=9dB

EEPROM Information

EEPROM Serial ID Memory Contents (A0h)

| Addr. (decimal) | Field Size (Bytes) | Name of Field | Content (Hex) | Content (Decimal) | Description |
|-----------------|--------------------|-----------------|---|--|---------------------------|
| 0 | 1 | Identifier | 03 | 3 | SFP |
| 1 | 1 | Ext. Identifier | 04 | 4 | MOD4 |
| 2 | 1 | Connector | 01 | 1 | SC |
| 3-10 | 8 | Transceiver | 00 00 00 80 00 00 00 00 | 00 00 00 128 00 00 00 00 | |
| 11 | 1 | Encoding | 03 | 3 | NRZ |
| 12 | 1 | BR, nominal | 19 | 25 | 2.488Gbps |
| 13 | 1 | Reserved | 00 | 0 | - |
| 14 | 1 | Length (9um)-km | 14 | 20 | 20/km |
| 15 | 1 | Length (9um) | C8 | 200 | 20km |
| 16 | 1 | Length (50um) | 00 | 0 | - |
| 17 | 1 | Length (62.5um) | 00 | 0 | - |
| 18 | 1 | Length (copper) | 00 | 0 | - |
| 19 | 1 | Reserved | 00 | 0 | - |
| 20-35 | 16 | Vendor name | 5A 2D 51 55 49 43 4B 20 20 20 20 20 20 20 20 20 | 90 45 81 85 73 67 75 32 32 32 32 32 32 32 32 32 | (ASCII) |
| 36 | 1 | Reserved | 00 | 0 | - |
| 37-39 | 3 | Vendor OUI | 00 00 00 | 0 0 0 | - |
| 40-55 | 16 | Vendor PN | 5A 4C 35 34 33 32 30 41 39 2D 4B 43 53 xx 20 20 | 90 76 53 52 51 50 48 65 57 45 75 67 83 xx 32 32 | (ASCII) |
| 56-59 | 4 | Vendor rev | 30 30 30 20 | 48 48 48 32 | "000" (ASCII) |
| 60-61 | 2 | Wavelength | 05 D2 | 05 210 | 1490 |
| 62 | 1 | Reserved | 00 | 0 | - |
| 63 | 1 | CC BASE | - | - | Check sum of bytes 0 - 62 |
| 64 | 1 | Reserved | 00 | 0 | |
| 65 | 1 | Options | 1C | 28 | |
| 66 | 1 | BR, max | 00 | 0 | - |
| 67 | 1 | BR, min | 00 | 0 | - |

| | | | | | |
|--------|-----|---------------------|----|-----|---|
| 68-83 | 16 | Vendor SN | - | - | ASCII |
| 84-91 | 8 | Vendor date | - | - | Year (2 bytes), Month (2 bytes), Day (2 bytes) |
| 92 | 1 | DDM Type | 60 | 96 | Internal Calibrated |
| 93 | 1 | Enhanced Option | 80 | 128 | LOS, TX_FAULT and Alarm/warning flags implemented |
| 94 | 1 | SFF-8472 Compliance | 02 | 2 | SFF-8472 Rev 10.3 |
| 95 | 1 | CC EXT | - | - | Check sum of bytes 64 - 94 |
| 96-255 | 160 | Vendor spec | | | |

Alarm and Warning Thresholds (Serial ID A2H)


| Parameter (Unit) | Temperature (°C) | Voltage (v) | Bias Current (mA) | TX Power (dBm) | | | RX Power (dBm) | | |
|------------------|------------------|-------------|-------------------|----------------|------|------|----------------|-----|-----|
| | | | | | | | | | |
| High Alarm | 100 | 3.6 | 80 | +5.5 | +7 | +8 | -8 | -10 | -10 |
| Low Alarm | -10 | 3 | 1 | +2 | +3.5 | +5 | -28 | -30 | -30 |
| High Warning | 95 | 3.5 | 70 | +5 | +6 | +7.5 | -9 | -11 | -11 |
| Low Warning | 0 | 3.1 | 2 | +2.5 | +4 | +6 | -27 | -29 | -29 |

Diagnostics


| Parameter | Unit | Accuracy | Range | Calibration |
|----------------------|------|----------|--|-------------------|
| Tx Optical Power | dB | ±3 | Po: -Pomin~Pomax dBm, Recommended operation conditions | External/Internal |
| Rx Optical Power | dB | ±3 | Pi: Ps~Pr dBm, Recommended operation conditions | External/Internal |
| Bias Current | % | ±10 | Id: 1-100mA, Recommended operating conditions | External/Internal |
| Power Supply Voltage | % | ±3 | Recommended operating conditions | External/Internal |
| Internal Temperature | °C | ±3 | Recommended operating conditions | External/Internal |

Digital Diagnostic Memory Map

The module provides digital diagnostic information of its operating conditions and status, including transmitting power, laser bias, receiver input optical power, module temperature, and supply voltage. Calibration and alarm/warning threshold data are written and stored in internal memory (EEPROM). The memory map is compatible with SFF-8472, as shown in Fig. 2. The diagnostic data are raw A/D values and must be converted to real world units using calibration constants stored in EEPROM locations 56 – 95 in A2h.

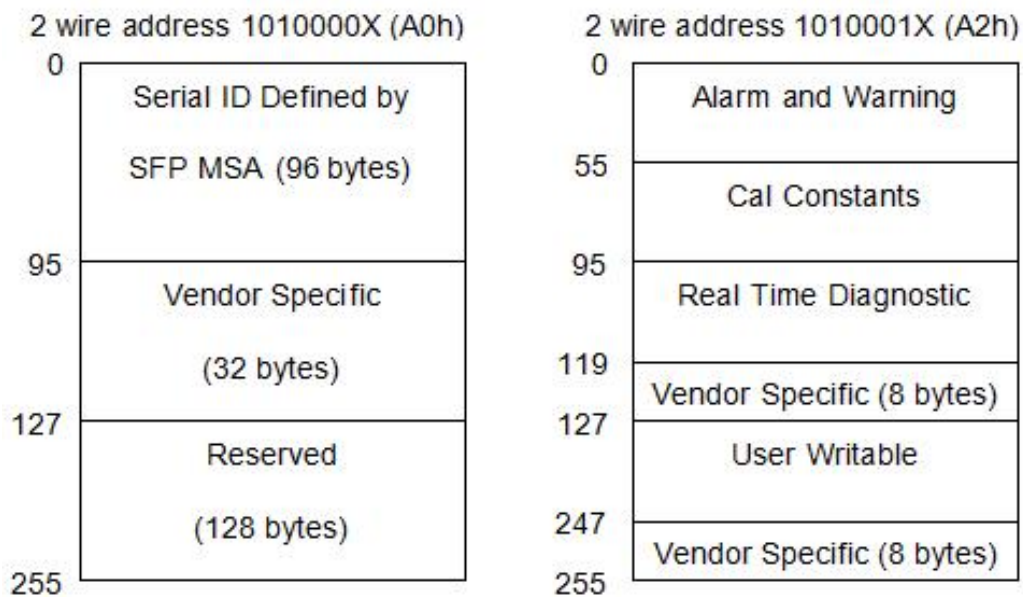

Pin Descriptions

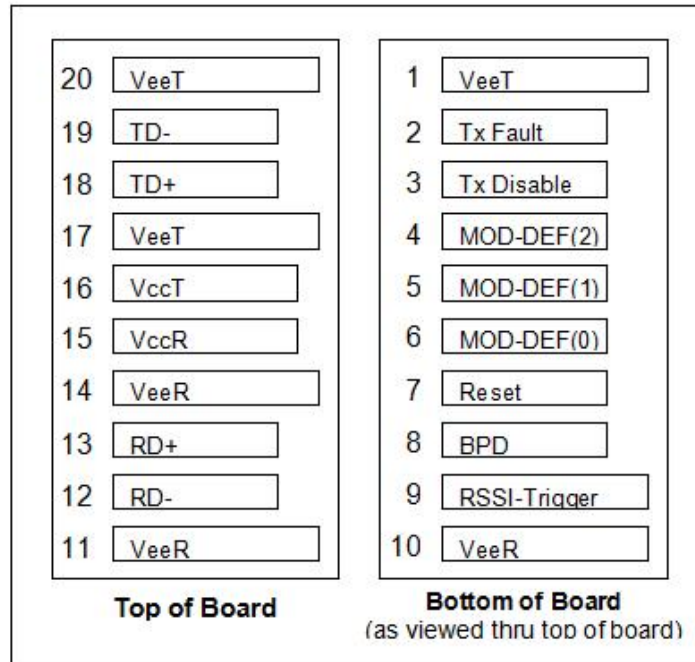


| Pin | Signal Name | Description | Plug Seq. | Notes |
|-----|--------------|-------------------------------------|-----------|--------|
| 1 | VeeT | Transmitter Ground | 1 | |
| 2 | Tx Fault | Transmitter Fault Indication | 3 | Note 1 |
| 3 | Tx Disable | Transmitter Disable | 3 | Note 2 |
| 4 | MOD-DEF2 | Module Definition 2 | 3 | Note 3 |
| 5 | MOD-DEF1 | Module Definition 1 | 3 | Note 3 |
| 6 | MOD-DEF0 | Module Definition 0 | 3 | Note 3 |
| 7 | Reset | Reset signal input | 3 | |
| 8 | BPD | Burst Power Detect (active HIGH) | 3 | Note 4 |
| 9 | RSSI-Trigger | Receiver Signal Strength Indication | 1 | |
| 10 | VeeR | Receiver Ground | 1 | Note 5 |
| 11 | VeeR | Receiver Ground | 1 | Note 5 |
| 12 | RD- | Inv. Receiver Data Out | 3 | Note 6 |
| 13 | RD+ | Receiver Data Out | 3 | Note 6 |
| 14 | VeeR | Receiver Ground | 1 | Note 5 |

| | | | | |
|----|------|--------------------------|---|-----------------|
| 15 | VccR | Receiver Power Supply | 2 | Note 7, 3.3V±5% |
| 16 | VccT | Transmitter Power Supply | 2 | Note 7, 3.3V±5% |
| 17 | VeeT | Transmitter Ground | 1 | Note 5 |
| 18 | TD+ | Transmitter Data In | 3 | Note 8 |
| 19 | TD- | Inv.Transmitter Data In | 3 | Note 8 |
| 20 | VeeT | Transmitter Ground | 1 | Note 5 |

Notes:

- TX Fault is an open collector/drain output, which should be pulled up with a 4.7K–10KΩ resistor on the host board. Pull up voltage between 2.0V and VccT, R+0.3V. When high, output indicates a laser fault of some kind. Low indicates normal operation. In the low state, the output will be pulled to < 0.8V.
- TX disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7–10 KΩ resistor. Its states are:
 Low (0 – 0.8V): Transmitter on
 (>0.8, < 2.0V): Undefined
 High (2.0 – 3.465V): Transmitter Disabled
 Open: Transmitter Disabled
- Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a 4.7K – 10KΩ resistor on the host board. The pull-up voltage shall be VccT or VccR.
 Mod-Def 0 is grounded by the module to indicate that the module is present
 Mod-Def 1 is the clock line of two wire serial interface for serial ID
 Mod-Def 2 is the data line of two wire serial interface for serial ID
- BPD is pulled up internally with a 4.7K – 10KΩ resistor. Pull up voltage between 2.0V and VccT, R+0.3V. When LOW, this output indicates the received optical power is below the worst-case receiver sensitivity (as defined by the standard in use). HIGH indicates normal operation. In the low state, the output will be pulled to < 0.8V.
- VeeR and VeeT may be internally connected within the SFP module.
- RD-/+: These are the differential receiver outputs. They are DC coupled 100Ω differential lines which should be terminated with 100Ω (differential) at the user SERDES.
- VccR and VccT are the receiver and transmitter power supplies. They are defined as 3.3V ±5% at the SFP connector pin. Maximum supply current is 450mA. Recommended host board power supply filtering is shown below. Inductors with DC resistance of less than 1Ω should be used in order to maintain the required voltage at the SFP input pin with 3.3V supply voltage. When the recommended supply filtering network is used, hot plugging of the SFP transceiver module will result in an inrush current of no more than 30 mA greater than the steady state value. VccR and VccT may be internally connected within the SFP transceiver module.
- TD-/+: These are the differential transmitter inputs. They are AC-coupled, differential lines with 100Ω differential termination inside the module. The AC coupling is done inside the module and is thus not required on the host board.

Recommended Interface Circuit

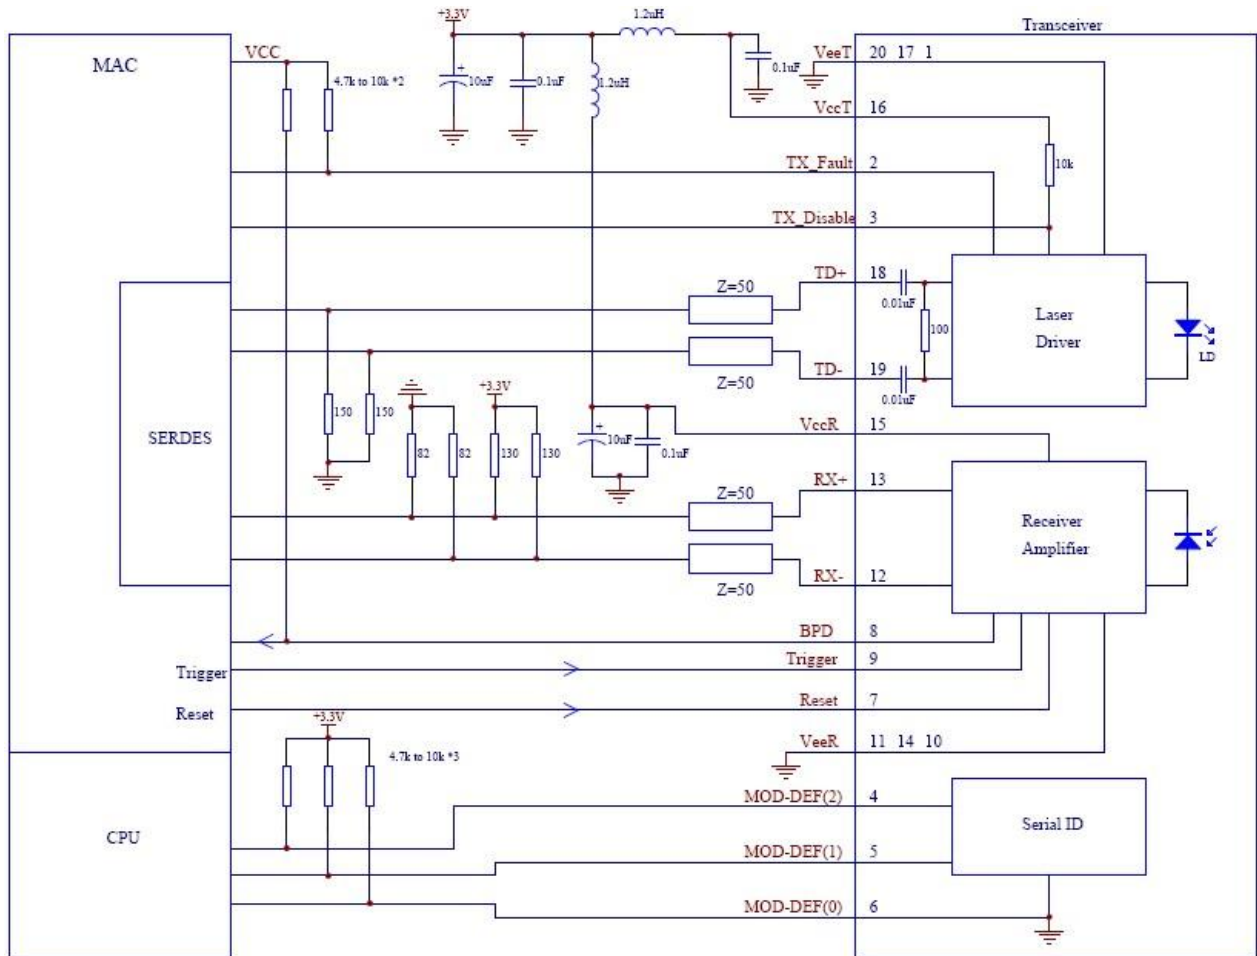

Timing Parameter Definition

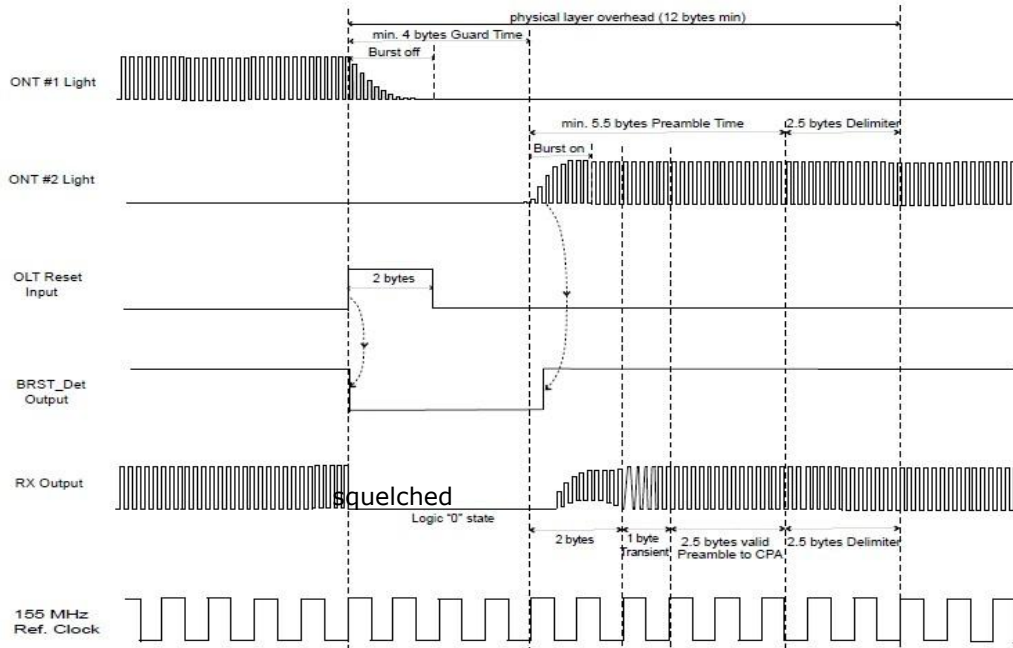


Figure1 Time parameter definition in GPON system

Timing Of Digital RSSI





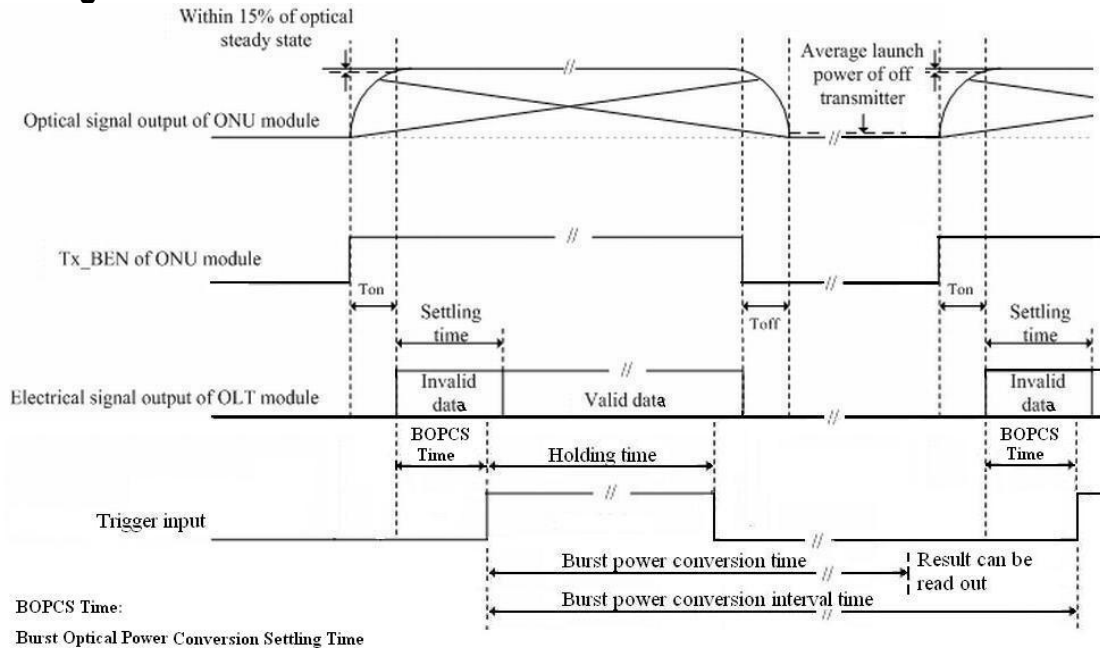


Figure2 Trigger sequence definition in GPON system

| PARAMETER | SYMBOL | MIN | TYP | MAX | UNITS |
|------------------------------|-----------------|-----|-----|-----|-------|
| Packet Length | - | 600 | - | - | ns |
| Trigger delay | BOPCS | 100 | - | - | ns |
| RSSI Trigger and Sample Time | Holding Time | 400 | - | - | ns |
| Internal delay | Conversion time | 500 | - | - | us |

Mechanical Dimensions

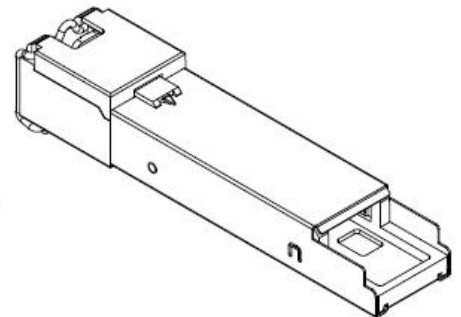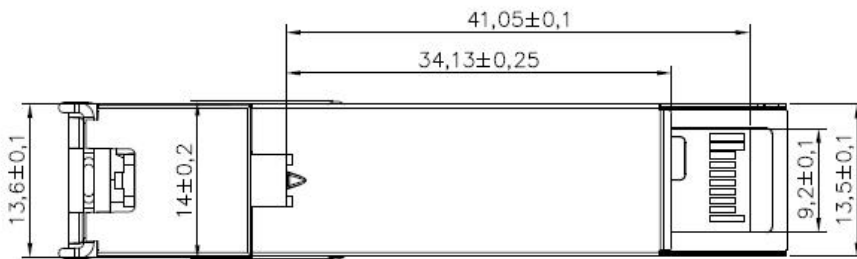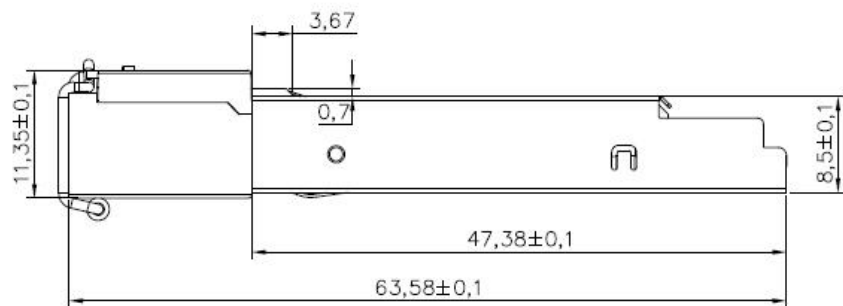

Ordering information

| Part Number | Product Description |
|---------------|---|
| GPT-NSS2-20DC | 1490T/1310R, 2.5Gbps/1.25Gbps, SC/UPC, 20km, 0°C~+70°C, with DDM, CLASS B+ |
| GPT-NSS3-20DC | 1490T/1310R, 2.5Gbps/1.25Gbps, SC/UPC, 20km, 0°C~+70°C, with DDM, CLASS C+ |
| GPT-NSS4-20DC | 1490T/1310R, 2.5Gbps/1.25Gbps, SC/UPC, 20km, 0°C~+70°C, with DDM, CLASS C++ |

For More Information

Tel:+86-755-23301665

E-mail : sales@fibertoptech.com

Web: <http://www.fibertoptech.com>